

HI-POWER BULLET CAMERA

특징

Sony 1/2.8" Starvis CMOS Sensor (IMX291)	1920 x 1080 Pixels
WDR / BLC	Day & Night
	DNR / DEFOG

상세사양

Image Sensor	Sony 1/2.8" Starvis CMOS Sensor (IMX291)
Total Pixel	1920 x 1080 Pixels
Scanning system	Progressive
Resolution	Digital: 1080(30P), 720(60P) Max: 1,100TV lines(1080P)
Min. Illumination	0.0001 lux/F1.2 (sense-up)
Video Output	HD-SDI, EX-SDI, HD-TVI: 1080P 30FPS, 720P 60FPS CVBS: NTSC/PAL
S/N Ratio	More than 50dB (AGC off)
Lens	DC / Manual
AGC	OFF / 0 -10
Shutter Speed	AUTO / MANUAL (1/30 - 1/30,000 sec)
SENS-UP	OFF / X2 - X32
Brightness	0 - 20
WDR/BLC	OFF / BLC / WDR
D-WDR(ACE)	OFF / LOW / MIDDLE / HIGH
Defog	OFF / LOW / MIDDLE / HIGH
Day&Night	AUTO / COLOR / B&W / EXTERN
White Balance	AUTO / AUTOext / PRESET / Manual
DNR (Digital Noise Reduction)	OFF / LOW / MIDDLE / HIGH
Mirror / Flip	OFF / ON
Sharpness	0 - 10 steps
Privacy Mask	16 Masks
Motion Detection	OFF / ON
Language	English/Chinese/Chinese(S) /Japanese/Korean
Power (Max.) supply	DC12V ~ 48V
Power Input	Connector
Video Output	HD-SDI: MBG/MMCX connector, HD-CVI,HD-TVI,AHD,CVBS

▶ 제품의 사양은 사전 통보 없이 변경 될수 있습니다.

HI-POWER BULLET CAMERA


구성품



주의사항

- 특수한 환경이나 주변 환경에 따라 색상이 다르게 보이거나, 밝기 차이 또는 특수한 현상이 발생 할 수 있습니다. OSD 메뉴를 이용 하여 환경에 맞게 설정 하시기 바랍니다.
- Day에서 Night 전환시점에 급격한 밝기 변화로 인해 2~3초간 영상이 너무 밝게 보일 수 있습니다. 상기현상은 화면 밝기를 찾아가는 과정의 정상 동작이니 참고 바랍니다.
- 케이블을 절단하면 CCTV 동작이 되지 않습니다.

설치방법

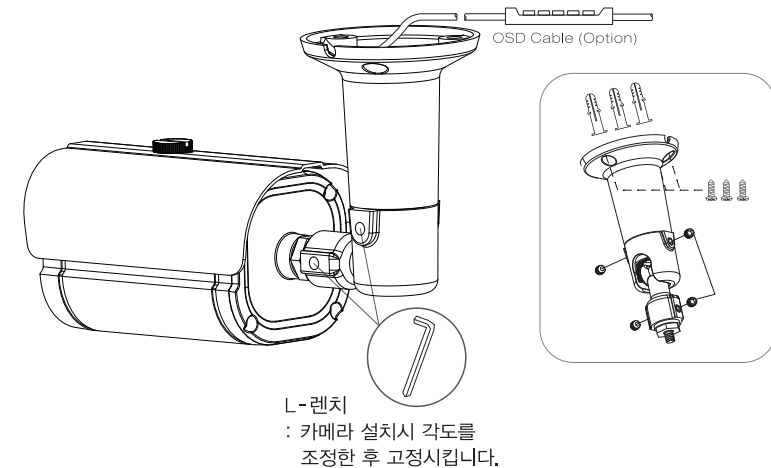

축조정

