

4M. EX-SDI

ADVANCED IR LED OUTDOOR CAMERA


1/2.9 inch SONY CMOS (IMX-326) / High Definition (1440P / 1080P)
0 Lux at IR On (IR LED 6 pcs) / DNR (Digital Noise Reduction)
WDR (Wide Dynamic Range) / Day & Night (ICR Option) / Easy Installation
ICR V/F lens, DC Auto IRIS V/F Lens, DC Auto IRIS & TDN V/F Lens
Fixed lens : 4mm Fixed Lens



The bracket image
is a reference.



DOME DIMENSIONS (mm)

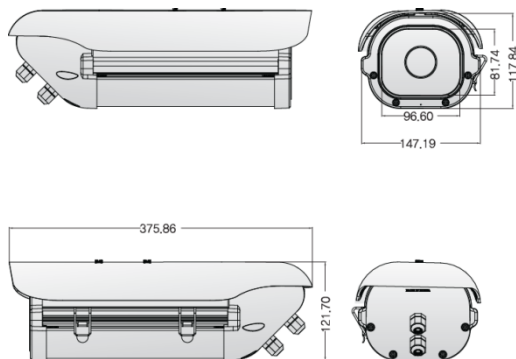

Specification	4MP. HPOD 50SD2H6T-40W
Resolution	1440P, 1080P, 720P
Sensor	1/2.9 inch SONY CMOS (IMX-326)
Total Pixels	3096(H) x 2218(V) = 6.87M
Effective Pixels	2184(H) X 2202(V) = 4.81M
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPT274M (EX-SDI, HD-SDI) / (TVI, AHD, CVI, CVBS: 1.0Vp-p (75ohm) : Option)
Min.Illumination	0 Lux at IR On
White Balance	AUTO / AUTO EXT / PRESET / MANUAL
Electronic shutter speed	AUTO / MANUAL (1/30sec ~ 1/30,000sec) / FLICKER
SENS_UP	OFF / X2 ~ X32
DNR / ACE	OFF / LOW / MIDDLE / HIGH
BACKLIGHT	OFF / WDR / BLC / HLC
Day & Night	AUTO (Day <--> Night TIME Change) , COLOR , B/W, EXTERN
PRIVACY / FLIP	OFF / ON
MOTION / DEFOG	OFF / ON
Language	ENG, CHN, CHN(S), JPN, KOR
Sharpness / Smart IR / Brightness	ADJUSTABLE (Sharpness : 0 ~ 10 STEP / Smart IR, Brightness : 0 ~ 20 STEP)
COMM.	RS-485(PELCO-D)
Operating Temperature/Humidity	-10°C~+50°C / 30%~80% RH
Storage Temperature/Humidity	-20°C~+60°C / 20%~90% RH
Power	DC12V [AC24V / DC12V DualPower (option)]
signal Transmission	The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI 200M / EX-SDI 500M)