

EX-SDI 2.0

ADVANCED IR LED DOME CAMERA


1/2.8 inch SONY CMOS (IMX-291) / 0 Lux at IR On (IR LED 15 pcs)

DNR (Digital Noise Reduction) / Day & Night (ICR Option) / Easy Installation

Fixed Lens 4.3mm, 6mm



DOME DIMENSIONS (mm)

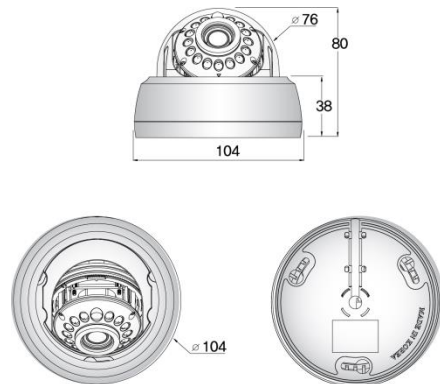

Specification	S77 (EX-SDI) . HID5 S7715
Resolution	1080P, 720P,
Sensor	1/2.8 inch SONY CMOS (IMX-291)
Total Pixels	1945(H) x 1109(V) = 2.16M
Effective Pixels	1945(H) X 1097(V) = 2.13M
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE292M (EX-SDI, HD-SDI) / (TVI, CVI, CVBS: 1.0Vp-p (75ohm) : Option)
Min.Illumination	0 Lux at IR On
White Balance	AUTO
Electronic shutter speed	AUTO
DNR	ON
Day & Night	EXTERN,
Temperature/Humidity	Operating (-10°C~+50°C / 30%~80% RH) / Storage (-20°C~+60°C / 20%~90% RH)
Power	Only DC12V
signal Transmission	The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI (200M) / EX-SDI (500M))