

OUTDOOR

ADVANCED IR LED OUTDOOR CAMERA

SONY 1/2.8" STARVIS CMOS SENSOR (IMX291)

1920 x 1080 PIXELS


WDR / BLC

DAY & NIGHT

DNR / DEFOG



DOME DIMENSIONS (mm)

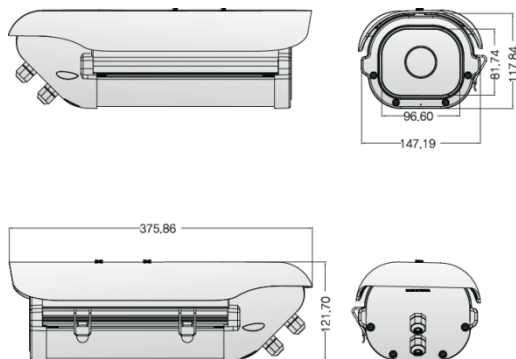

The bracket image
is a reference.

Image Sensor	Sony 1/2.8" Starvis CMOS Sensor (IMX291)
Total Pixel	1920 x 1080 Pixels
Scanning system	Progressive
Resolution	Digital: 1080(30P), 720(60P) Max: 1,100TV lines(1080P)
Min. Illumination	0.0001 lux/F1.2 (sense-up)
Video Output	HD-SDI, EX-SDI, HD-TVI: 1080P 30FPS, 720P 60FPS CVBS: NTSC/PAL
S/N Ratio	More than 50dB (AGC off)
Lens	DC / Manual
AGC	OFF/ 0 -10
Shutter Speed	AUTO/ MANUAL (1/30 - 1/30,000 sec)
SENS-UP	OFF/ X2- X32
Brightness	0 - 20
WDR/BLC	OFF/ BLC/ WDR
D-WDR(ACE)	OFF/ LOW/ MIDDLE/ HIGH
Defog	OFF/ LOW/ MIDDLE/ HIGH
Day&Night	AUTO/ COLOR/ B&W/ EXTERN
White Balance	AUTO/ AUTOext/ PRESET/ Manual
DNR (Digital Noise Reduction)	OFF/ LOW/ MIDDLE/ HIGH
Mirror / Flip	OFF/ ON
Sharpness	0-10 steps
Privacy Mask	16 Masks
Motion Detection	OFF/ ON
Language	English/Chinese/Chinese(S) /Japanese/Korean
Power (Max.) supply	DC12V ~ 48V
Power Input	Connector
Video Output	HD-SDI: MBG/MMCX connector, HD-CVI,HD-TVI,AHD,CVBS