




▼ SPECIFICATION

HT-841
8ch / 240FPS / 1920x1080p / 5HDD / Web Viewer

▼ DIMENSION

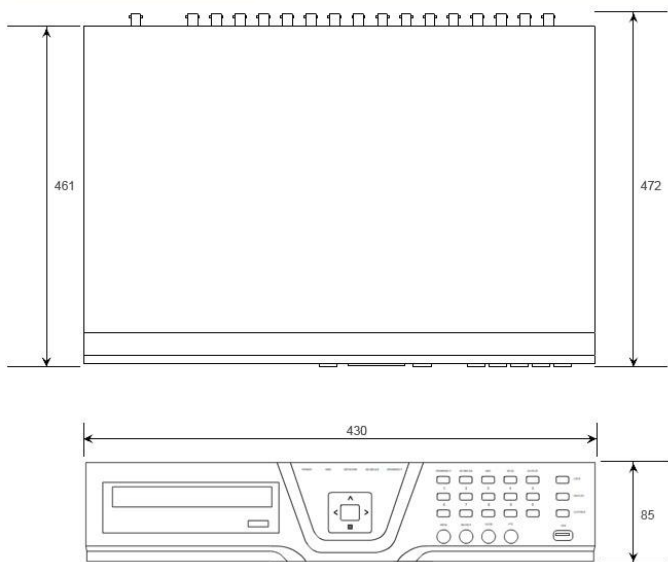

▼ SPECIFICATION

Model	HT-841	
Performance	PENTAPLEX	
Display Speed	Real-Time	
Recording Max.(1080p)	120 fps	
Speed Max.(720p)	240 fps	
Video In	Channel	8CH (BNC)
	Signal Level	HD – SDI (SMPTE 292M)
	Main Display	HDMI
Video Output	Main Display Resolution	1920×1080 (P), 1920×1080 (I) , 1280×720 (P), 1440×900
	Sub Display	VGA
	SPOT	1 HDMI, 1 BNC
Audio	Input / output	8/1
Alarm	Input / output	8/2
Details		
Screen	Display Split Interface	1, 4, 7, 9
	Format / Codec	Graphic User Interface
Video	Image Quality	Auto Detection / H.264 Advanced
	Recording type	Highest / High / Normal / Low
	Interface type	Schedule / Continuous / Event (Motion, Alarm)
Storage	RAID	SATA II / Up to 5 HDD's
		RAID 0/1/5 JBOD
Connectors	USB port	USB port * 2
Function		
	OSD	On / Off
Live Display	Border Color / Digital Zoom	Selectable / Up to 4X
	Cameo	Camera Adjustment / Camera position change / Freeze / Audio on
Motion	Area	Adjustable GRID (22 X 15)
	Sensitivity	5 Level motion detection
	Hidden Video	Video is hidden in Live view but it is recorded
	PTZ	Supported recent PTZ camera protocol / Preset up to 255 / RS 485 / RS 232
System	Private Zone	Block the private zone in live view
	Auto Time Synchron	By NTP(Network Time Protocol)
	Firmware Update	Via USB or Remote firmware upgrade via Network
	SMART Alarm	Auto Detect & Monitoring of HDD's problem
	Source	Motion / Alarm In / Video loss
Event	Action	Recording, e-Mail notification, Log file, Send message to Remote, Buzzer, Pop Up Window, Alarm, PTZ preset
	Pre/Post Alarm	Yes (Up to 60 sec / Up to 100 sec)
Record	Resolution	SMPTE 292M (1080p or 720p)
	Quality	4 Levels (Highest / High / Normal / Low)
	Speed(Forward & Reverse)	x1, x2, x4, x8, x16
	Quick / Event search	Search by time with calendar / Search by event
Search	Repeat search	Select specific time period and playback repeatedly
	Panorama search	Frame by frame playback
	Smart search	Event oriented playback
	CAMEO	Live monitoring during playback, Playback camera change, Freeze and Digital zoom support
Backup	File format	DVR Format
	Media	DVD / USB device
	Protocol	Static IP, DHCP, DDNS
Network	Physical / Mac Layer	RJ45 (10/100/1000 Mbps), Ethernet
	Browser	SMS, Web Viewer, Smart Phone Viewer (I-phone, Android, Blackberry)
Environment		
Operating Temperature/Humidity	0~40℃ / 20~80% RH	
Dimension/Weight	440(W) X 480(D) X 132(H) / 14Kg (without HDD)	
Power Requirement/Consumption	AC 100V – 220V (50Hz-60Hz) / 500W	