

H.264

16ch



**IQ-1604H**


- 16ch
- H.264 / 1280 x 1024
- WEB, SmartPhone View

#### ▼ SPECIFICATION

IQ-1604H

16ch / 480FPS / 1280×1024 / H.264 / Web Viewer

#### ▼ DIMENSION

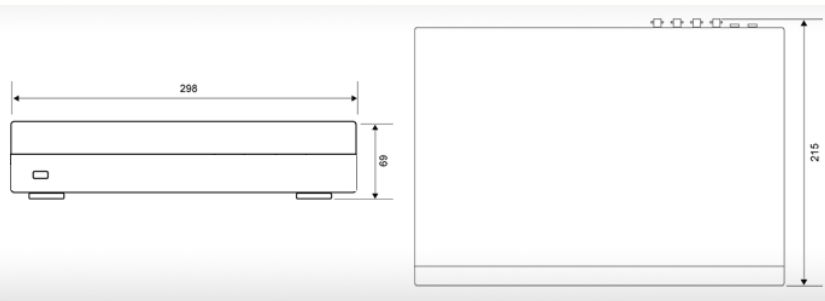

#### ▼ SPECIFICATION

|                            |                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                      | IQ-1604H                                                                                                                                           |
| Operationg System          | Embedded Linux                                                                                                                                     |
| Compression                | H.264                                                                                                                                              |
| Audio Compression          | G723.1                                                                                                                                             |
| Video Standard             | NTSC / PAL                                                                                                                                         |
| Input                      | 16ch                                                                                                                                               |
| Output                     | Loop Out (4/9/16 ), Composite (1), Spot(1), S-VHS(1) VGA(1)                                                                                        |
| Resolution                 | Max. 1280 x 1024                                                                                                                                   |
| Display Mode               | TV, CCTV, VGA Monitor (Selectable)                                                                                                                 |
| Live                       | Real Time View                                                                                                                                     |
| Split Mode in Live Display | 1, 4, 6, 8, 9, 10, 13, 16                                                                                                                          |
| RecordReso<br>ution        | NTSC<br>CIF(352×240), 2CIF(704×240), D1(704×480)<br>PAL<br>CIF(352×288), 2CIF(704×288), D1(704×576)                                                |
| RecordSpee<br>d            | CIF(NTSC/PAL) 480 / 400 fps<br>2CIF(NTSC/PAL) 240 / 200 fps<br>D1(NTSC/PAL) 120 / 100 fps                                                          |
| Record Mode                | Emergency, Schedule, Sensor, Motion,Sensor+Motion, Pre & post Alarm Reco<br>rding                                                                  |
| Search                     | Mode<br>Calendar, Date & Time, Event Search, First Search, Last Search<br>Speed<br>x1, x2, x4, x8, x10                                             |
| Audio                      | In / Out<br>4 / 1<br>Volume<br>Adjustable                                                                                                          |
| Sensor In / Alarm Out      | 4 / 1                                                                                                                                              |
| Port                       | Rs-232<br>Rs-485<br>TCP-IP                                                                                                                         |
| Network Transmission       | External Keyboard Controller & PTZ<br>10/100/1000 Base-Tx Ethernet (RJ-45) – Fixed IP, DHCP & DDNS                                                 |
| Remote Management (IE)     | Video Dual Stream (Local recording & Network Transmission)<br>CMS, Web Monitoring( <a href="http://www.livesecu.com">http://www.livesecu.com</a> ) |
| BackupDevic<br>e           | Internal<br>ODD Backup (Optional)<br>External<br>Local Backup by USB Memory Stick and Network Backup by CMS & Web bro<br>wser                      |
| HDD                        | 2 x SATA HDD                                                                                                                                       |
| System Operation           | USB Mouse, IR Remote Controller, External Keyboard<br>Multi Language                                                                               |
| Etc                        | PTZ control by Virtual Joystick(operated by mouse)<br>Backup Viewer Auto Copy & AVI Export                                                         |
| Power                      | 12VDC 5A Adaptor                                                                                                                                   |
| Operation Temp.            | 0°C ~ 40°C                                                                                                                                         |
| Dimension                  | 340mm (w) x 64mm (h) x 328mm (d)                                                                                                                   |
| Weight                     | 3.5Kg                                                                                                                                              |