

H.264

4ch





IQ-404H

- 4ch
- H.264 / 1280 x 1024
- WEB, SmartPhone View

▼ SPECIFICATION

IQ-404H
4ch / 480FPS / 1280×1024 / H.264 / Web Viewer

▼ DIMENSION

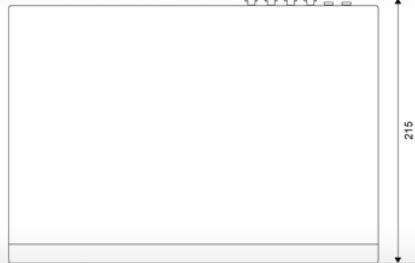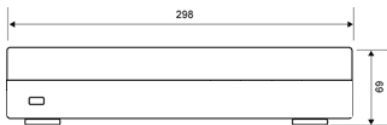

▼ SPECIFICATION

Model	IQ-404H
Operationg System	Embedded Linux
Compression	H.264
Audio Compression	G723.1
Video Standard	NTSC / PAL
Input	4ch
Output	Loop Out (4/9/16), Composite (1), Spot(1), S-VHS(1) VGA(1)
Resolution	Max. 1280 x 1024
Display Mode	TV, CCTV, VGA Monitor (Selectable)
Live	Real Time View
Split Mode in Live Display	1, 4
RecordReso ution	NTSC PAL CIF(352×240), 2CIF(704×240), D1(704×480) CIF(352×288), 2CIF(704×288), D1(704×576)
RecordSpee d	CIF(NTSC/PAL) 480 / 100 fps 2CIF(NTSC/PAL) 240 / 100 fps D1(NTSC/PAL) 120 / 100 fps
Record Mode	Emergency, Schedule, Sensor, Motion,Sensor+Motion, Pre & post Alarm Reco rding
Search	Mode Speed Calendar, Date & Time, Event Search, First Search, Last Search x1, x2, x4, x8, x10
Audio	In / Out Volume 4 / 1 Adjustable
Sensor In / Alarm Out	4 / 1
Port	Rs-232 Rs-485 TCP-IP External Keyboard Controller & PTZ
Network Transmission	10/100/1000 Base-Tx Ethernet (RJ-45) – Fixed IP, DHCP & DDNS
Remote Management (IE)	Video Dual Stream (Local recording & Network Transmission) CMS, Web Monitoring(http://www.livesecu.com)
BackupDevic e	Internal External ODD Backup (Optional) Local Backup by USB Memory Stick and Network Backup by CMS & Web bro wser
HDD	2 x SATA HDD
System Operation	USB Mouse, IR Remote Controller, External Keyboard Multi Language
Etc	PTZ control by Virtual Joystick(operated by mouse) Backup Viewer Auto Copy & AVI Export
Power	12VDC 5A Adaptor
Operation Temp.	0°C ~ 40°C
Dimension	340mm (w) x 64mm (h) x 328mm (d)
Weight	3.5Kg