

410K

Hidden
Camera

IQ-PIR622

- 41만화소 / 600TVL
- Pinhole Lens 3.7mm


▼ SPECIFICATION

IQ-PIR622

410k / Pinhole Lens 3.7mm / 0.1Lux at F1.2 (color) / 0.01Lux (B/W) / 600TVL

- 1/3 INCH SONY SUPER HAD CCD II
- HIGH RESOLUTION / HIGH SENSITIVITY 600TVL
- 0.1Lux at F1.2 (color) / 0.01Lux (B/W)
- DAY AND NIGHT FUNCTION / EASY INSTALLATION

▼ DIMENSION

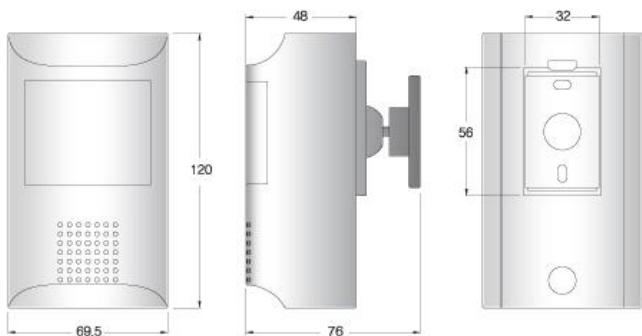

▼ SPECIFICATION

HD CCTV DVR
www.iseeq.co.kr

Specification	IQ-PIR622
Resolution	600 TV Line
Sensor	1/3 INCH SONY SUPER HAD CCD II
Total Pixels	811(H) x 508(V) 410K pixels (NTSC) / 795(H) x 595(V) 470K pixels (PAL)
Effective Pixels	768(H) x 494(V) 380K pixels (NTSC) / 752(H) x 582(V) 440K pixels (PAL)
Scanning System	2:1 Interlace
S/N (Y signal)	More than 50 dB (AGC Off)
Frequency	Horizontal:15.734KHz / Vertical:59.94Hz (NTSC) Horizontal:15.625KHz / Vertical:50.00Hz (PAL)
Video Output	CVBS: 1.0Vp-p / 75ohm
Min.Illumination	0.1Lux at F1.2 (color) / 0.01Lux (B/W)
Electronic shutter speed	AUTO (1/60sec~1/100,000sec) (NTSC) AUTO (1/50sec~1/100,000sec) (PAL)
White Balance	ATW
AGC (Auto Gain Control)	ON
Day & Night	AUTO
Operating Temperature/Humidity	-10°C~+50°C / 30%~80% RH
Storage Temperature/Humidity	-20°C~+60°C / 20%~90% RH
Power	DC12V Only
Lens	Pinhole Lens 3.7mm