

500K

Color
Search IR


IQ-SIL120T

- 50만화소 / 650TVL
- Lens 6/8/12mm / 필 10LED + IR 50LED + 씨치 60LED
- IP68

▼ SPECIFICATION

- 50만화소
- 렌즈 6/8/12mm
- 필 10LED + IR 50LED + 씨치 60whiteLED
- IP68 방수설계

▼ DIMENSION

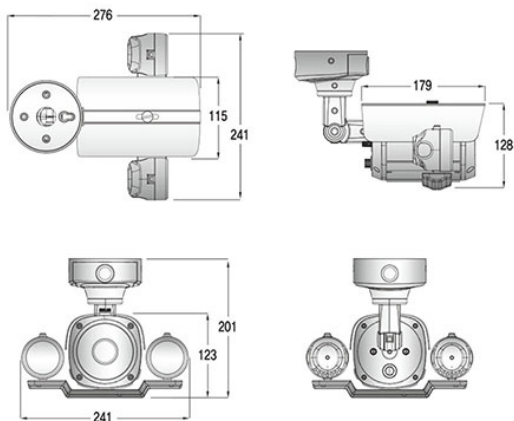

▼ SPECIFICATION

Model	IQ-SIL120T
Resolution	650 TV Line
Sensor	1/3" HIGH Sensitivity CCD
Total Pixels	811(H) x 508(V) 410K pixels (NTSC) / 795(H) x 595(V) 470K pixels (PAL)
Effective Pixels	768(H) x 494(V) 380K pixels (NTSC) / 752(H) x 582(V) 440K pixels (PAL)
Scanning System	2:1 Interlace
S/N (Y signal)	More than 52 dB (AGC Off)
Frequency	Horizontal : (15.734KHz / Vertical : 59.94Hz NTSC), (15.625KHz / Vertical : 50.00Hz PAL)
Video Output	CVBS: 1.0Vp-p / 75ohm
Min.Illumination	0 Lux at IR On
O.S.D	Built-in (Option : OSD cable controlled)
White Balance	AUTO / AUTO EXT / PUSHING / MANUAL
Electronic shutter speed	AUTO/MANUAL(1/60sec ~ 1/100,000sec NTSC),(1/50sec ~ 1/100,000sec PAL)
D-WDR (Wide Dynamic Range)	ON / OFF
Backlight Compensation	BLC / HLC / HBLC / OFF
AGC (Auto Gain Control)	LOW / MIDDLE / HIGH / OFF Selectable
3DDNR (3D digital noise reduction)	OFF / LOW / MIDDLE / HIGH / AUTO
Day & Night	AUTO (Day <=> Night time Change) / EXT / COLOR / B/W
Smart IR	ON / OFF
Privacy	OFF / ON (8 Zone)
Smart Motion Detection	OFF / ON (4 Zone)
Image Conversion	ON / OFF
LSC(Lens Shading Compensation)	ON / OFF
Sharpness	ADJUSTABLE
LANGUAGE	ENGLISH, SPANISH, PORTUGUESE, RUSSIAN, GERMAN, ITALIAN, NEDERLAND, KOREAN, CHINESE
Operating Temperature/Humidity	- 10°C ~ + 40°C / 30% ~ 80% RH
Storage Temperature/Humidity	- 20°C ~ + 60°C / 20% ~ 90% RH
Power	DC12V Only / DC12V-AC24V DualPower (option)