




HD 2.1M / 3.5~16mm /
써치라이트 60LED
IR 50 LED + 펄 10 LED

외관도

단위:mm

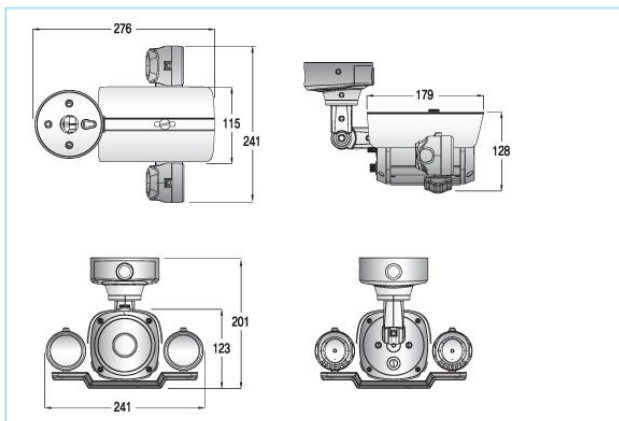

제품특징

- HIGH DEFINITION SERIAL DIGITAL INTERFACE
- HD-SDI (1080P,720P) / HIGH RESOLUTION 1000TVL
- 0 Lux at IR On (M10/50 WHITE 60) / WATERPROOF (IP68)
- WDR (WIDE DYNAMIC RANGE) / SMART IR
- MDIR (MOTION DETECTION IR) / TRUE DAY & NIGHT(ICR)
- DNR (DIGITAL NOISE REDUCTION) / D.ZOOM / PRIVACY

주요사양

모델	IQHD-120
해상도	HD-SDI(1080P 720P) / 1000 TV LINE OVER
센서	1/3" INCH SONY CMOS
화소수	2010(H) x 1108(V) = 2,227,080
유효 화소수	1944(H) x 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
영상출력	SMPT292M (HD-SDI) / (CVBS: 1.0Vp-p (75ohm) : Option)
최저조도	0 Lux at IR ON (IR LED Mix H30/N50/White 60)
화이트밸런스	AUTO / AUTO EXT / PUSHING / MANUAL
전자셔터 스피드	AUTO / MANUAL (1/30sec ~ 1/60,000sec)
밝기	ADJUSTABLE (0 ~ 20 STEP)
SENS_UP	OFF / X2 / X3 / X4
DNR	OFF / LOW / MIDDLE / HIGH
WDR / BLC	OFF / WDR / BLC
HLM	OFF / SET
ACE	OFF / ON
Day & Night	AUTO (Day <--> Night TIME Change) / COLOR / B/W / EXTERN / MDIR
프라이버시	OFF / ON (16 Zone)
동작감지	OFF / ON
디지털줌	0 ~ X127
플립	OFF / ON
FREEZE	OFF / ON
이미지반전	OFF / ON
선명도	ADJUSTABLE (0 ~ 10 STEP)
통신	RS-485(PELCO-D)
작동주위 온도/습도	-10°C~+50°C / 30%~80% RH
동작주위 온도/습도	-20°C~+60°C / 20%~90% RH
전원	DC12V [AC24V / DC12V DualPower (option)
렌즈	DC Auto IRIS & TDN V/F 3.5~16mm

Made in KOREA