

LITE 32

HD,아날로그,IP를 한번에 묶은 올인원DVR

FullHD




제품특징

- 32채널 HD DVR
- 480FPS@720p / 240FPS@1080p
- H.264 / JPEG for 3G, Dual CODEC
- 1920x1080p HDMI Display
- 1,4,6,8,9,13,16,24,32 화면분할
- 4 SATA + 1 eSATA

외관도

단위:mm

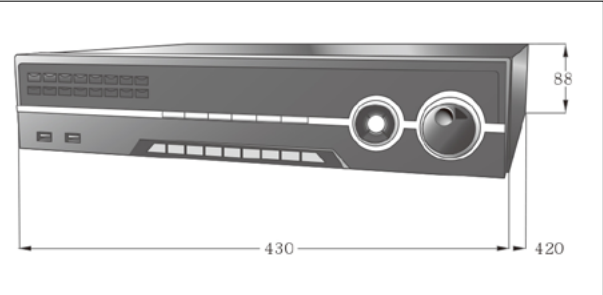

주요사양

Model		LITE All in One series (HD+SD+IP)
		LITE32
영상	카메라 입력	32 BNC
	신호 타입	All Hybrid(Patent)
	지원해상도	720p25,30,50,60/1080p25,30,50,60/1080i50,60/Composite/960H/ Mixed
	출력	1 HDMI+1 VGA (simultaneously) / 1 Programmable SPOT with OSD
음성	음성 입력	16 RCA
	음성 출력	1 RCA
센서 인		16 (NC, NO selectable)
알람 출력		14 TTL, 2 relay
작동 OS		리눅스
디스플레이	속도	리얼타임
	해상도	1280X1024, 1280X720, 1920X1080
	분할모드	1,4,6,8,9,13,16,24,32
레코딩	코덱	H.264 / JPEG for 3G, Dual CODEC
	해상도	720p, 1080p,1080i, 960H, 720H, Mixed
	이미지 품질	4 steps (Super, High, Medium, Low)
	속도	NTSC area 480fps@720p/240fps@1080p PAL area 400fps@720p/200fps@1080p
플레이백	디스플레이	1,4,6,8,9,13,16,24,32
	검색모드	Calendar, Event ,POS , Panorama, Thumbnail
	속도	NTSC area 240fps@720p/120fps@1080p PAL area 200fps@720p/100fps@1080p
	Fast/Slow speed	Normal, REW & FF [recorded speed x2, x4, x8, x16,x32,x64,x1/2,x1/4], Frame to frame, Pause
네트워크	네트워크 인터페이스	Gigabit Ethernet
	스피드	60fps@1080p
	프로토콜	TCP/IP, HTTP, DHCP
	어플리케이션	Windows 2000 / XP / Vista / 7 / 8 (PC Client system& IE)/MAC
	웹 브라우저	Internet Explorer, Safari, Chrome, Firefox
	스마트폰	Android, iPhone for live and search
백업	인터페이스	USB 2.0 X 3
	백업장비	External HDD, CD&DVD-RW, Network, Thumb Drive
HDD		4 SATA + 1 eSATA(upto 12bays, No capacity limit ; 4TB of more)
기능	•Full GUI with alpha blending	
	•해상도, 프레임, 이미지 품질 독립제어	
	•Instant Replay	
	•디지털줌	
	•마우스 컨트롤	
	•Weekly scheduler with holiday by 10 minutes setting	
	•Covert, Disable and Private function of cameras	
	•동작감지 with 352 area setting	
	•Relay alarm output	
	•PTZ control by RS-485	
	•Daylight Saving Time and Network Time Setting	
	•Multi User Authority up to 8 Users	
	•Deinterlacer upon live and playback	
	•17 languages with full graphic	
	•Individual Network port setting	
	•Auto Deletion	
	•Import and Export the configuration	
	•Mirroring	
	•POS Interface	
	•Dual CODEC engine for independent video transmission	
	•Interactive setup via network	
기타	소비전류	60W
	작동 온도	5 ~40℃(41~104F)
	작동 습도	Maximum 80% non-condensing
	외형치수	430(W)×420(D)×88(H) mm

HD Hybrid DVR ..