

Full HD

HYBRID




MAGIC-16R(Hybrid)
All Hybrid 16ch / 480FPS / 4HDD
1920x1080p

All Hybrid 16채널 / 480FPS /
4 SATA + 1 eSATA HDD
스마트폰, 웹, MMS, 원격뷰어

외관도

단위:mm

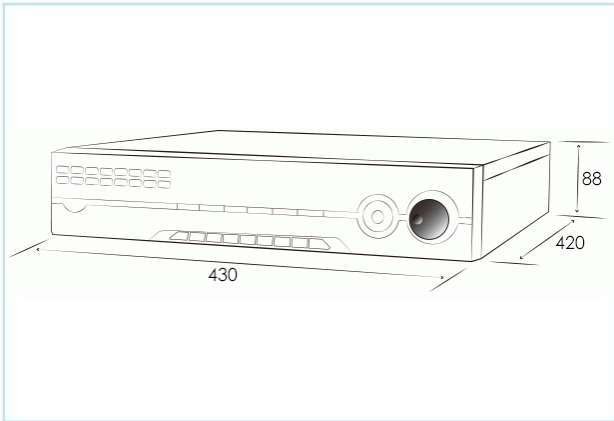

제품특징

- H.264 / JPEG for 3G, Dual CODEC
- 480fps@1080p
- All Hybrid(Patent)
- Calendar, Event ,POS , Panorama, Thumbnail Search MODE

주요사양

Model	MAGIC-16R(Hybrid) 16ch 19" rack type 16 BNC
Video	Individual HD/Ana log selectable Available source 720p25,30,50,60/1080p25,30,50,60/1080i50,60/Composite/960H/Mixed Output 1 HDMI+1 VGA (simultaneously) / 1 Programmable SPOT with OSD
Audio	Audio input Output 4 RCA 1 RCA
Sensor In	4 (NC, NO selectable)
Alarm out	1 relay
Operating System	Embedded Linux OS
Speed	Real Time
Display	Resolution (Pixel) Split screen CODEC Resolution (Pixel) Picture quality 1280X1024, 1280X720, 1920X1080 1,4,6,8,9,13,16 H.264 / JPEG for 3G, Dual CODEC 720p, 1080p,1080i, 960H, 720H, Mixed 4 steps (Super, High, Medium, Low)
Recording	Speed NTSC area 480fps@1080p
Playback	Display Search mode Speed NTSC area 120fps@1080p Fast/Slow speed Normal, REW & FF [recorded speed x2, x4, x8, x16,x32,x64,x1/2,x1/4], Frame to frame, Pause
Network	Network Interface Speed Protocol Application Web Browser Smart phone App Gigabit Ethernet 120fps@1080p TCP/IP, HTTP, DHCP Windows 2000 / XP / Vista / 7 / 8 (PC Client system& IE)/M AC Internet Explorer Android, iPhone for live and search
Backup	Interface Backup device The number of HDD USB 2.0 X 3 External HDD, CD&DVD-RW, Network, Thumb Drive 4 SATA + 1 eSATA(upto 12 bays, No capacity limit ; 4TB or more)
Function	•Full GUI with alpha blending •Individual setting of resolution, frame rates and picture quality •Instant Replay •Digital Zoom •Mouse Control •Weekly scheduler with holiday by 10 minutes setting •Covert, Disable and Private function of cameras •Motion Detection with 352 area setting •Relay alarm output •PTZ control by RS-485 •Daylight Saving Time and Network Time Setting •Multi User Authority up to 8 Users •Deinterlacer upon live and playback •17 languages with full graphic •Individual Network port setting •Auto Deletion •Import and Export the configuration •Mirroring •POS Interface •Dual CODEC engine for independent video transmission •Interactive setup via network
Others	Power Consumption Operating Temperature Relative Humidity Dimension 150W 5 ~40°C(41~104F) Maximum 80% non-condensing 430(W)×420(D)×88(H) mm

품질에서 앞서갑니다.

100% 대한민국 국내생산
IP67/68 국내최고등급 실외제품 방수
규격케이스
하우징브라켓 국내 자체 생산 금형
아이비전이 만들면 다릅니다.