



# PDR-AHD1004 / PDR-AHD1008 / PDR-AHD1016

AHD DVR

AHD DVR ::

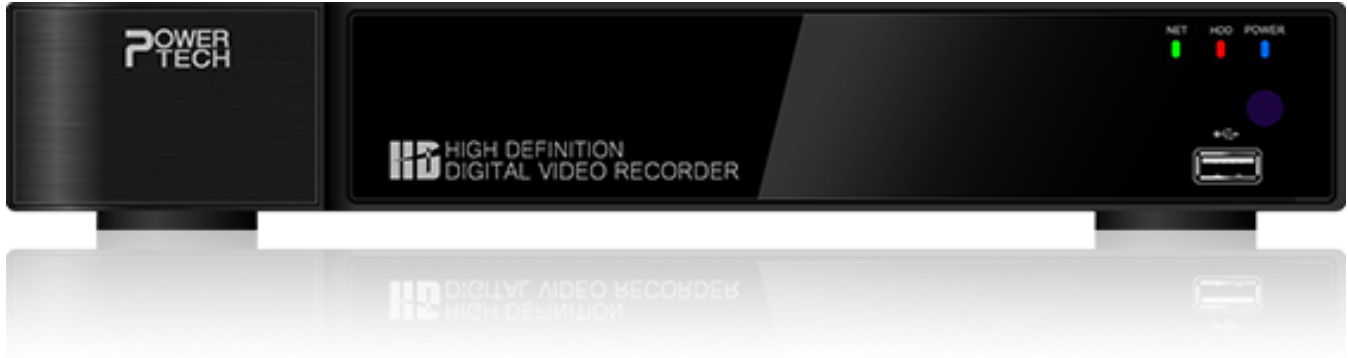

## 제품특징

- 130만화소 DVR
- 케이블교체 없이 DVR과 카메라만 교체
- 1920x1080 HDMI Display
- H.264 Codec
- 4채널:120fps
- 8채널:240fps
- 16채널:480fps
- 1SATA HDD
- 스마트폰 원격뷰어(TouchCMS)

## 주요사양

| 스펙                  |          | 4채널                                                                                         | 8채널              | 16채널             |
|---------------------|----------|---------------------------------------------------------------------------------------------|------------------|------------------|
| 영상 입력               |          | 4ch BNC                                                                                     | 8ch BNC          | 16ch BNC         |
| 영상 출력               |          | HDMI(1920x1080i), VGA(1920x1080i)                                                           |                  |                  |
| 압축                  |          | H.264                                                                                       |                  |                  |
| 작동OS                |          | Embedded LINUX                                                                              |                  |                  |
| 컨트롤                 |          | 리모컨, 마우스                                                                                    |                  |                  |
| 라이브                 |          | Real Time Display                                                                           |                  |                  |
| 녹화속도                | NTSC     | 60fps@ 1280x720                                                                             | 120fps@ 1280x720 | 240fps@ 1280x720 |
|                     |          | 120fps@ 960x480                                                                             | 240fps@ 960x480  | 480fps@ 960x480  |
|                     |          | 120fps@ 360x240                                                                             | 240fps@ 360x240  | 480fps@ 360x240  |
|                     | PAL      | 50fps@ 1280x720                                                                             | 100fps@ 1280x720 | 200fps@ 1280x720 |
|                     |          | 100fps@ 960x576                                                                             | 200fps@ 960x576  | 400fps@ 960x576  |
|                     |          | 100fps@ 360x288                                                                             | 200fps@ 360x288  | 400fps@ 360x288  |
| 음성 입/출력             |          | 4 in / 1 out                                                                                |                  |                  |
| 특징                  |          |                                                                                             |                  |                  |
| 디스플레이               |          | Brightness, Contrast, Color Adjustment Per Channel                                          |                  |                  |
| 녹화 모드               |          | Manual, Schedule, Alarm, Motion                                                             |                  |                  |
| Alarm Recording     |          | Pre-Alarm: 5sec~300sec / Post-Alarm: 5sec ~ 300sec                                          |                  |                  |
| 동작감지                |          | 8x8 Grids per Channel                                                                       |                  |                  |
| 검색 모드               |          | Date & Time, Camera, Alarm / Motion / Video loss, Motion area                               |                  |                  |
| 재생 모드               |          | Forward & Reverse: Pause, Frame by Frame<br>Normal Speed, 2x, 4x, 8x, 16x                   |                  |                  |
| Multi-tasking       |          | Simultaneous Live Display, Playback, Record/Back-up, Remote Transmission                    |                  |                  |
| Watchdog            |          | Power Failure Recovery: Auto Reboot with Maintaining Previous Record Settings               |                  |                  |
| Watermark           |          | Provided                                                                                    |                  |                  |
| Back up             |          | USB Flash Memory Stick, e-SATA External HDD, External CD/DVD-RW, Client S/W, Webserver, FTP |                  |                  |
| Interface           |          | RS485, Ethernet(10/100 Base-T), USB 2.0                                                     |                  |                  |
| Alarm In/Out(Relay) |          | 4 in / 1 Out                                                                                |                  |                  |
| HDD                 | Internal | 1 Intenal SATA port                                                                         |                  |                  |
|                     | External | 1 e-SATA port                                                                               |                  |                  |
| 전원                  |          | DC 12V-2A                                                                                   |                  |                  |
| 네트워크                |          | LAN, WAN, Internet (MAX 10 Users)                                                           |                  |                  |
| Client Service      |          | EMS 2.0 : PC Client Software for Windows, MAC, Linux                                        |                  |                  |
|                     |          | Web Client Software (Internet Explorer)                                                     |                  |                  |
|                     |          | Smart Phone Apps (iPhone, Android, Windows Mo-bile)                                         |                  |                  |
| 작동환경                |          | 30 ~ 80% RH, 5 oC ~40 oC (41 oF ~ 104 oF)                                                   |                  |                  |
| 외형치수                |          | 380mm (W) x 72mm (H) x 340mm (D)                                                            |                  |                  |

## 외관도

단위:mm

