

AHD 1.3M DVR




- AHD HD 720P 1.3Megapixel
- AHD+SD 하이브리드 시스템
- 1SATA HDD + 1eSATA HDD(Option)
- HDMI Output
- Client Service : PC, Smart phone



외관도

단위:mm

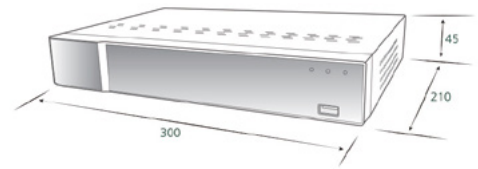

모델		AHD HD-04A	AHD HD-08A	AHD HD-16A
영상 입력		4ch BNC	8ch BNC	16ch BNC
영상 출력		HDMI(1920x1080i), VGA(1920x1080i)		
압축		H.264		
작동 OS		Embedded LINUX		
컨트롤		리모컨, 마우스		
라이브		Real Time Display		
녹화속도	NTSC	60fps@ 1280x720	120fps@ 1280x720	240fps@ 1280x720
		120fps@ 960x480	240fps@ 960x480	480fps@ 960x480
		120fps@ 360x240	240fps@ 360x240	480fps@ 360x240
	PAL	50fps@ 1280x720	100fps@ 1280x720	200fps@ 1280x720
		100fps@ 960x576	200fps@ 960x576	400fps@ 960x576
		100fps@ 360x288	200fps@ 360x288	400fps@ 360x288
음성 입/출력		4 in / 1 out		
특징				
디스플레이		Brightness, Contrast, Color Adjustment Per Channel		
녹화 모드		Manual, Schedule, Alarm, Motion		
Alarm Recording		Pre-Alarm: 5sec~300sec / Post-Alarm: 5sec ~ 300sec		
동작 감지		8x8 Grids per Channel		
검색 모드		Date & Time, Camera, Alarm / Motion / Video loss, Motion area		
재생 모드		Forward & Reverse: Pause, Frame by Frame		
		Normal Speed, 2x, 4x, 8x, 16x		
Multi-tasking		Simultaneous Live Display, Playback, Record/Back-up,		
		Remote Transmission		
Watchdog		Power Failure Recovery: Auto Reboot with Maintaining		
		Previous Record Settings		
Watermark		Provided		
Back up		USB Flash Memory Stick, e-SATA External HDD,		
		External CD/DVD-RW, Client S/W, Webserver, FTP		
Interface		RS485, Ethernet(10/100 Base-T), USB 2.0		
Alarm In/Out(Relay)		4 in / 1 Out		
HDD	Internal	1 Intenal SATA port		
	External	1 e-SATA port		
전원		DC 12V-2A		
네트워크		LAN, WAN, Internet (MAX 10 Users)		
Client Service		EMS 2.0 : PC Client Software for Windows, MAC, Linux		
		Web Client Software (Internet Explorer)		
		Smart Phone Apps (iPhone, Android, Windows Mobile)		
작동환경		30 ~ 80% RH, 5℃ ~40℃ (41°F ~ 104°F)		
외형치수		300mm (W) x 45mm (H) x 210mm (D)		

SPECIAL LIST

AHD CAMERA

HD-SDI CAMERA

HD PTZ

DVR

SLOC

ANALOG • ETC